

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
2 December 2004 (02.12.2004)

PCT

(10) International Publication Number
WO 2004/105069 A1

- (51) International Patent Classification⁷: **H01H 85/046**, 85/042, 85/10 (74) Agent: **CHOCHOROWSKA-WINIARSKA**, Krystyna; ABB Corporate Research, ul. Starowisla 13 A, PL-31-038 Krakow (PL).
- (21) International Application Number: PCT/PL2003/000092 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 18 September 2003 (18.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: P-360332 26 May 2003 (26.05.2003) PL (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): **ABB SP. ZO. O.** [PL/PL]; ul. Bitwy Warszawskiej 1920r, nr 18, PL-02-366 Warszawa (PL).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **WILNIEWCZYC, Mariusz** [PL/PL]; ul. Szkoły Orlat 1/38, PL-03-984 Warszawa (PL). **KALTENBORN, Uwe** [CH/CH]; Pflgerstrasse 65, CH-5405 Dättwil (CH). **HOFFMANN, Guido** [CH/CH]; Lindenstrasse 9, CH-5430 Wettingen (CH). **KALTENEGGER, Kurt** [CH/CH]; Chratzstrasse 12, CH-5426 Lengnau (CH).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: A HIGH-VOLTAGE THICK-FILM HIGH RUPTURING CAPACITY SUBSTRATE FUSE

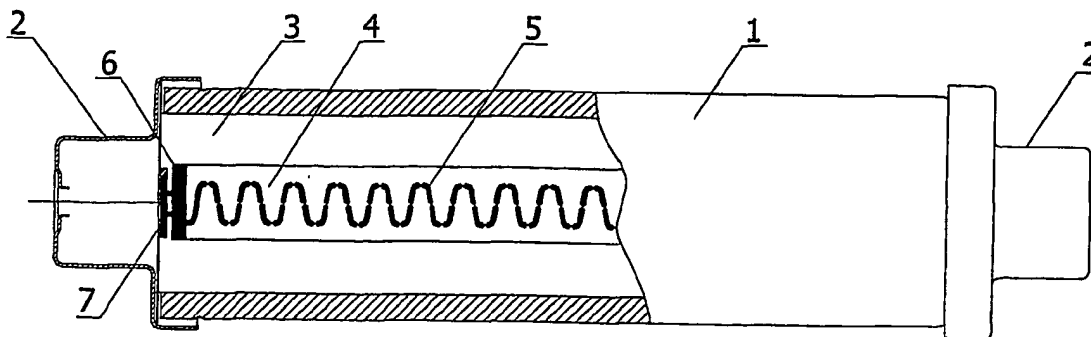

(57) Abstract: The subject of the invention is a high-voltage thick-film high rupturing capacity substrate fuse. The characteristic feature of the inventive fuse is that inside a tubular insulating casing */1/*, which is closed at both ends with metal endocaps */2/* and filled with arc quenching medium */3/*, there is located at least one insulating substrate */4/*, along which there is placed at least one fuse element */5/* in the form of a thin conducting film and which has terminal areas */6/* at its ends, which areas are electrically connected with the end-caps by specially shaped contacts */7/* located inside the end-caps. The fuse element comprises a basic part formed by multiple identical V-shaped modules and two end modules forming electric connections between the basic part and the terminal areas. In each module, the arms of the V shape, of a specific width, end with arches directed outwards */8/*, which arches are connected with the arches of the arms of the neighboring modules by means of line segments, thus forming a line, which bends many times at a constant angle and has truncated vertices in each module, in which line at least one module contains at least one edge constriction */9/*, enabling opening of the current path when the fuse is overloaded.

WO 2004/105069 A1

10/557532**IAP20 RECEIVED 21 NOV 2005**

A high-voltage thick-film high rupturing capacity substrate fuse

The subject of the invention is a high-voltage thick-film high rupturing capacity substrate fuse that can be used to protect high-voltage electric equipment and systems used in power engineering industry, and specially to protect transformer systems.

5 To protect high-voltage electric systems typical high-voltage fuses are used, which comprise a tubular insulating tube inside which an insulating ceramic support is located with spirally wound fuse element in the form of a strip. The insulating casing is tightly closed at both ends by end-caps. Free space between the external surface of the ceramic support and the internal surface of the
10 insulating casing is completely filled with arc quenching medium. Free ends of the strip fuse-elements are connected to metal contacts, which are connected with the metal end-caps through which the fuse is incorporated in the circuit of the protected electric system. Depending on the fuse rating, fuse elements comprise a specific number of recurrent modules. The modules contain fuse element overload
15 spots, which are made by suitable notches made in both edges of the fuse element. The shape of those notches and their appropriate arrangement significantly affect the range of the fuse functional parameters. The described high-voltage fuses require the application of a precise production process for the shaping of recurrent (within the required tolerance) constrictions in the fuse strip, and a time- and labour-consuming process necessary to wind fuse elements on
20 insulating ceramic supports.

Besides typical high- and medium-voltage fuses, there are known other solutions, in which no insulating ceramic support or core is used. A suitably shaped fuse element in the form of a strip, tape or wire is placed in a casing, and
25 its ends are connected with the output leads of the fuse. An example of this type of

fuse is known from the publication of European patent application No. EP 0 621 621.

From the state of the art there are known electric fuses, which, instead of an insulating ceramic support and a fuse strip wound around it, comprise at least one fuse element in the form of a thin conducting film, which is applied onto a suitable supporting material, which does not conduct electric current.

Such a fuse containing a thick-film fuse element is known from US patent description No. 5 095 297. The fuse described therein contains a casing with open ends, connecting covers attached to those casing ends, a base with a fuse element being a thin, electrically conductive film, which is placed inside the casing, a disk element located in the open end of the casing inside the connecting cover, which disk element has a slot, in which the end of the base is placed, and the disk element contains solder which provides electric connection between the fuse element and the connecting cover. The fuse element has the form of a strip provided with fuse element overload spots in the form of notches cut-out in both edges of the strip. The fuse element is applied onto the ceramic base by magnetron spraying. The presented solution is suitable only for fuses of low current rating. The single and rectilinear fuse element as used in this solution does not allow for application of this solution for the protection of high-voltage and high current systems. In commonly used high-voltage fuses, the high-voltage fuse element is always longer than the standard length of fuses commonly used to protect high-voltage equipment.

Another known fuse of that type is known from US patent description No. 5 148 141. This fuse contains a casing, output leads connected to the casing, a base made of insulating material and a fuse element in the form of a thin film made of an electrically conducting material. This film is applied on the base surface and the fuse element forms a current path between the fuse output leads. On the base surface there is an additional resistive layer, which forms a resistance element outside the surface region occupied by the current path. This layer is electrically connected in parallel with the fuse element and it is a shunted current path of the fuse. This solution, like the one presented in US description No. 5 095 297, is not suitable for the protection of high-voltage and high current systems.

Still another example of a thick-film fuse is an electric fuse for light overload currents presented in patent description US No. 4 140 988. This fuse has a cylindrical casing of insulating material, granulated arc quenching medium, which fills the casing, a base of fibreglass, which is immersed in the arc quenching medium and is covered with a conductor in the form of a conductive metal layer. The fuse also has means of connecting the fuse into an electric circuit, for example solder, and the fibreglass is saturated with water suspension of melamine resin and hydrated aluminium oxide, which has a double function consisting in ensuring good adhesion of the conducting layer to the base and in improving the conditions of arc quenching by releasing gas to blanket the arc. Although in this solution the conductor is made of a thin metal foil, from which the fuse element is etched, which makes this type of fuse suitable for use only with low electric currents, it is possible to use several fuse elements connected in parallel, in the form of a printed circuit. The fuse element is fixed in the base by means of the layer which saturates this base. The fuse element, made by photochemical etching-out of a part of metal from the metal conductor, consist of a glow part and an overload part, which can be made, for instance, by the application of a thin silver layer onto a thin copper layer. The fuse element has the shape of identical individual meanders of constant width, arranged symmetrically to each other and connected by the overload part, whose width is larger than the width of the meanders, and the free ends of the meanders, being the end of the current path, have a shape resembling the letter „C” founded on the conductor width and they are connected with solder. The presented solution has certain drawbacks, such as:

- 1) complicated and expensive process of etching of the fuse element;
- 2) complicated structure of the base material, necessary to obtain the required adhesion between the conducting layer and the base;
- 3) soldered connection of the fuse element to the fuse casing, unusual in modern designs of high-voltage fuses;
- 4) lack of constrictions in the fuse element, which prevents arc voltage control during interruption and thus makes it impossible to use this design in high-voltage systems.

The essential quality of the high-voltage thick-film high rupturing capacity substrate fuse as per the invention, comprising a tubular insulating casing closed at both ends with metal end-caps and filled with arc quenching medium, in which at least one insulating substrate is located, along whose length there is placed at least one fuse element in the form of a thin conducting film and which has terminal areas at its ends, which areas are electrically connected with the end-caps by means of specially shaped contacts located inside the end-caps, is that the fuse element consists of a basic part, formed by many identical V-shaped modules thus forming a line bending many times at a constant angle and of two end modules providing electric connections between the basic part and the terminal areas. At least one module has at least one constriction enabling opening of the current path during fuse overload. The terminal areas are arranged along the two shorter edges of the insulating substrate.

Preferably, the angle between the arms of the letter „V” of each module of the basic part is selected to ensure appropriate insulating gaps between neighbouring modules required for high voltage.

Preferably, in each module, the arms of the letter „V”, of specific width, end with arches directed outwards, which are connected with the arches of the arms of the neighbouring modules by line segments, thus forming a sine curve bending many times at a constant angle and having truncated vertices in each module.

Preferably, the constriction is located in the truncated vertex of the module.

Preferably, the constriction is formed by making mirror notches in the opposite edges.

Preferably, the constriction is located on the line segment connecting the arches of the neighbouring modules.

Preferably, the constriction is located in the module arms and it is formed by making mirror notches in the opposite edges.

Preferably, the end module has the shape of one arm of an individual module.

Preferably, the end module has the shape of a line segment.

Preferably, the terminal areas are arranged perpendicular to the longer axis of the substrate.

Preferably, on one surface of the insulating substrate there are located at least two fuse elements, which are arranged parallel to one another.

Preferably, fuse elements together with terminal areas are arranged on opposite surfaces of the substrate.

Preferably, inside the casing there are located at least two insulating substrates, which are separated from one another by arc quenching medium.

5 Preferably, two insulating substrates are arranged parallel to one another.

Preferably, between two insulating substrates, along the longitudinal axis of the fuse there is placed an insulating tube, in which the fuse element of the striker is placed.

10 Alternatively, the fuse incorporates three insulating substrates, arranged in such a way that, in cross-section, they form an arrangement similar to an isosceles triangle.

Preferably, between three insulating substrates, along the longitudinal axis of the fuse there is placed an insulating tube, in which the fuse element of the striker is placed.

15 Alternatively, the fuse incorporates at least two insulating substrates, arranged in a radial pattern with respect to the longitudinal axis of the fuse.

Preferably, along the longitudinal axis of the fuse incorporating at least two insulating substrates arranged in a radial pattern with respect to the longitudinal axis of the fuse, there is placed an insulating tube, in which the fuse element of the
20 striker is placed.

Preferably, the insulating substrate is made of ceramics, glass-ceramics or glass.

Alternatively, the insulating substrate is made of a flexible material.

Preferably, the insulating substrate forms a roll, which is placed
25 longitudinally and centrally inside the casing.

Preferably, inside the roll formed by the insulating substrate, along the longitudinal axis of the fuse, there is placed an insulating tube, in which the fuse element of the striker is placed.

30 Alternatively, the fuse incorporates at least two insulating substrates arranged so that the longitudinal axis of each insulating substrate lies on a circle whose radius intersects the longitudinal axis of the fuse, and the transverse axis of each insulating substrate deviates at an acute angle from the line connecting the longitudinal axis of the fuse with the longitudinal axis of the insulating substrate.

Preferably, in the longitudinal axis of the fuse incorporating at least two insulating substrates, which are arranged at an acute angle with respect to the line connecting the longitudinal axis of the fuse and the longitudinal axis of the insulating substrate there is placed an insulating tube in which the fuse element of the striker is placed.

The advantage of the invention is the assurance of obtaining arc voltage required in high-voltage applications, by specific shaping of an individual fuse element and by the arrangement of individual fuse elements on the substrate. The shape of an individual fuse element resembling a meander of adequate length assures that the surface area of the substrate will be used to the maximum, while the outer dimensions of the substrate will be kept as small as possible. This advantage permits the placement of the high-voltage fuse element on the flat surface of the substrate in a standard-length high-voltage fuse.

The subject of the invention is illustrated by embodiment examples in the drawing, where fig. 1 shows a fuse as a partial view and partial section, fig. 2 – a substrate with one fuse element and conducting areas (view), fig. 3 – an individual module of the basic part with a constriction at the vertex, fig. 4 – an individual module of the basic part with constrictions at the vertex and arms, fig. 5 – a substrate with two fuse elements and conducting areas (view), fig. 6 – a substrate with two fuse elements arranged at opposite surfaces of the substrate, fig. 7 – a longitudinal section of the fuse with substrates and with the striker insulating tube and the striker, fig. 8 – a cross-section of the fuse with the striker insulating tube and with substrates arranged in a radial layout, fig. 9 – a cross-section of the fuse with the striker insulating tube and with substrates arranged in a triangle, fig. 10 – a cross-section of the fuse with the striker insulating tube and with parallel arrangement of substrates, fig. 11 – a cross-section of the fuse with the striker insulating tube and with the substrate in the form of a roll placed inside the fuse casing, fig. 12 – a cross-section of the fuse with the striker insulating tube and with substrates arranged in such a way that the longitudinal axis of each substrate is situated on a circle with a radius of R , and the transverse axis of the substrate deviates at an α angle from the insulating tube radius intersecting the longitudinal axis of the substrate.

The high-voltage thick-film high rupturing capacity substrate fuse incorporates a tubular insulating casing 1, at both ends closed with metal end-caps 2 and filled with arc quenching medium 3, in which there are placed insulating substrates 4, with fuse elements 5 arranged on them along their length and with terminal areas 6 located at both ends of the substrate, which areas are electrically connected with the end-caps by means of specially shaped contacts 7 located in the end-caps 2. The terminal areas are located along the two shorter edges of the substrate.

The fuse element 5 comprises a basic part formed by many identical modules whose shape approximates that of the letter „V” of a specific width and two end modules, also of a specific width, forming electric connections between the basic part and the terminal areas 6. In each module of the basic part the arms of the letter „V” end with arches directed outwards 8, which arches are connected with the arches of the arms of the neighbouring modules by line segments, thus forming a line, which bends many times at a constant angle and has truncated vertices in each module. In a special case of the embodiment of the fuse element, the arms of the letter „V” can be arranged parallel to one another thus forming a module shaped like the letter „U” (not shown in the drawing). In the embodiment shown in fig. 3, an individual module has one edge constriction 9, which is located in the truncated vertex of the module. The constriction 9 can be made as an opening of any shape, which is not shown in the drawing. In the second embodiment example shown in fig. 4, an individual module incorporates three constrictions 9, two constrictions being located in the module arms, and one constriction being located in the truncated vertex of the module.

In another embodiment of the invention, shown in fig. 5, on the substrate 4 there are placed two fuse elements 5, which are arranged parallel to each other on one surface of the substrate and which are connected to the terminal 6. On one surface of the substrate there can be many fuse elements arranged parallel to one another (not shown in the drawing). The number of the fuse elements depends on the fuse electric parameters.

Then, in an embodiment shown in fig. 6, fuse elements 5 are arranged on both surfaces of the substrate 4. As in the previous embodiment, the number of fuse elements depends on the fuse electric parameters.

In the fuse embodiment shown in fig. 7, the fuse incorporates an insulating tube 10, placed along the longitudinal axis of the fuse, in which the fuse element of the striker 11 is located.

Depending on the number of insulating substrates used in the given fuse
5 and on their situation with respect to the longitudinal axis of the fuse or the longitudinal axis of the insulating tube 10 of the striker fuse element 11 alternative designs of the fuse can be made.

And so, in the embodiment shown in fig. 8, the substrates 4 are arranged in a radial pattern with respect to the fuse longitudinal axis.

10 In another embodiment shown in fig. 9, the substrates 4 are arranged in such a way that, in cross section, their arrangement resembles an isosceles triangle.

In still another embodiment of the invention shown in fig. 10, the substrates 4 are arranged parallel to each other.

15 In a next embodiment of the invention shown in fig. 11, the substrate 4 is made of a flexible material and is coiled to form a roll, which is placed centrally inside the fuse, along its length.

In the embodiment shown in fig. 12, the substrates 4 are arranged in such a way that the longitudinal symmetry axes of these substrates are arranged as in the
20 embodiment shown in fig. 8 in a radial pattern with respect to the fuse longitudinal axis, and substrates 4 are twisted around their own longitudinal axes at an α angle.

In the embodiments shown in fig. 8, 9, 10, 11 and 12, between the substrates, along the fuse longitudinal axis, the insulating tube 10 is placed, in
25 which the fuse element of the striker is placed. The same solutions can be applied in the cases where a striker is not incorporated in the fuse design.

Claims

1. A high-voltage thick-film high rupturing capacity substrate fuse incorporating an insulating tubular casing closed at both ends by metal end-caps and filled with arc quenching medium, in which casing at least one insulating substrate is located having at least one fuse element, placed on it along its length, in the form of a thin, electrically conductive film, and having terminal areas located at its ends, which areas are electrically connected with the end-caps by specially formed contacts located in the end-caps, **characterised in that** the fuse element (5) consists of a basic part, formed by many identical modules having a shape resembling the letter „V”, thus forming a line bending many times at a constant angle, and of two end modules forming electric connections between the basic part and the terminal areas, at least one module having at least one constriction (9) allowing for the opening of the current path during fuse overload, and the terminal areas (6) being arranged along the two shorter edges of the insulating substrate.
2. A fuse as per claim 1 characterised in that that the angle between the arms of the letter „V” of each module of the basic part is selected to assure appropriate insulating gaps between neighbouring modules, required for high voltage.
3. A fuse as per claim 1 characterised in that in each module the arms of the letter „V” of specific width end with arches directed outwards, which are connected with the arches of the arms of the neighbouring modules by line segments, thus forming a sine curve bending many times at a constant angle and having truncated vertices in each module.

4. A fuse as per claim 3, characterised in that the constriction (9) is located in the truncated vertex of a module.
5. A fuse as per claim 4, characterised in that the constriction (9) is formed by mirror notches made in the two opposite edges.
6. A fuse as per claim 1, characterised in that the constriction (9) is located on the line segment connecting the arches of the arms of neighbouring modules.
7. A fuse as per claim 1, characterised in that the constriction (9) is located in the arms of a module and is formed by mirror notches made in the two opposite edges.
8. A fuse as per claim 1, characterised in that the end module has the shape of one arm of a single module.
9. A fuse as per claim 1, characterised in that the end module has the shape of a line segment.
10. A fuse as per claim 1, characterised in that the terminal areas (6) are arranged parallel to the longer axis of the substrate.
11. A fuse as per claim 1, characterised in that on one surface of the substrate (4) there are located at least two fuse elements (5), which are arranged parallel to each other.
12. A fuse as per claim 1 or 11, characterised in that at least two fuse elements (5) together with the terminal areas (6) are arranged on opposite surfaces of the substrate (4).
13. A fuse as per claim 1 or 11 or 12, characterised in that inside the casing (1) there are placed at least two insulating substrates (4), which are separated from one another by arc quenching medium (3).
14. A fuse as per claim 13, characterised in that it incorporates two insulating substrates (4), which are arranged parallel to one another.
15. A fuse as per claim 14, characterised in that between the insulating substrates (4), along the fuse longitudinal axis, there is placed an insulating tube (10), which houses the fuse element of the striker (11).
16. A fuse as per claim 13, characterised in that it incorporates three insulating substrates (4), arranged in such a way that, in cross-section, they form an arrangement resembling an isosceles triangle.

17. A fuse as per claim 16, characterised in that between the insulating substrates (4), along the fuse longitudinal axis, there is placed an insulating tube (10), which houses the fuse element of the striker (11).
18. A fuse as per claim 13 characterised in that it incorporates at least two insulating substrates (4), arranged in a radial pattern with respect to the fuse longitudinal axis.
19. A fuse as per claim 18, characterised in that, along the longitudinal axis of the fuse incorporating at least two insulating substrates (4) arranged in a radial pattern with respect to the fuse longitudinal axis, there is placed the insulating tube (10), which houses the fuse element of the striker (11).
20. A fuse as per claim 1, characterised in that the insulating substrate is made of ceramics, glass-ceramics or glass.
21. A fuse as per claim 1, characterised in that the insulating substrate (4) is made of flexible material.
22. A fuse as per claim 21 characterised in that the insulating substrate (4) forms a roll, which is placed longitudinally and centrally inside the casing (1).
23. A fuse as per claim 22, characterised in that inside the roll formed by the insulating substrate (4), along the fuse longitudinal axis there is placed the insulating tube (10), which houses the fuse element of the striker (11).
24. A fuse as per claim 13, characterised in that it incorporates at least two insulating substrates (4), which are arranged in such a way that the longitudinal axis of each insulating substrate (4) is located on the circle with a radius of (R) intersecting the fuse longitudinal axis, and the transverse axis of each insulating substrate (4) deviates from the line connecting the longitudinal axes of the fuse and the insulating substrate (4) at an acute angle (α).
25. A fuse as per claim 24, characterised in that along the fuse longitudinal axis there is placed the insulating tube (10), which houses the fuse element of the striker (11).

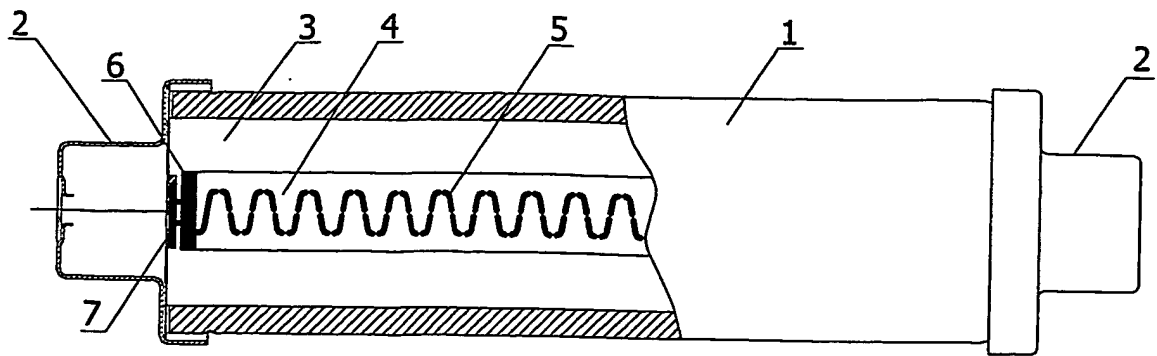


Fig. 1.

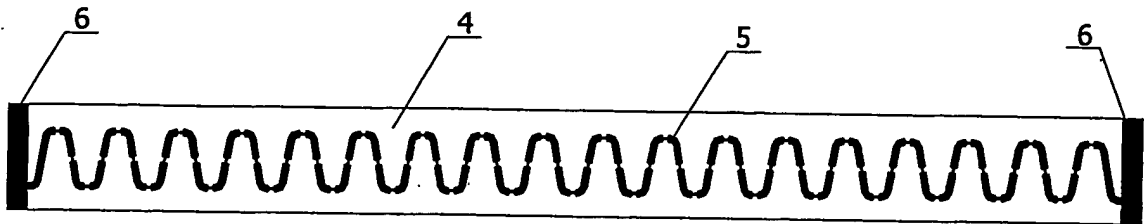


Fig. 2.

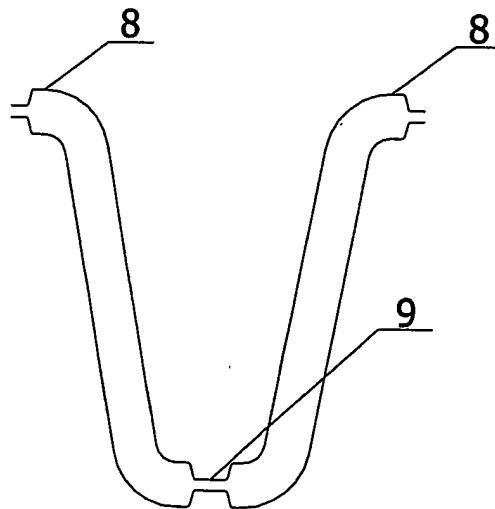


Fig. 3.

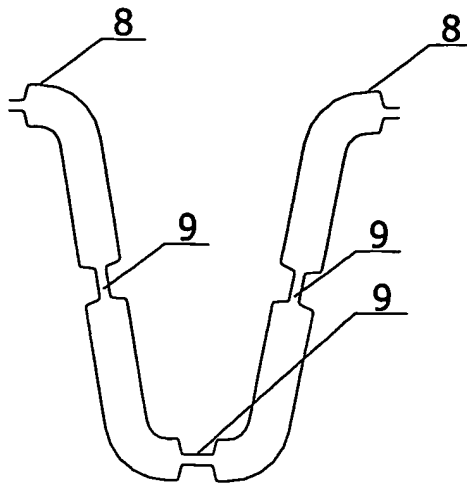


Fig. 4.

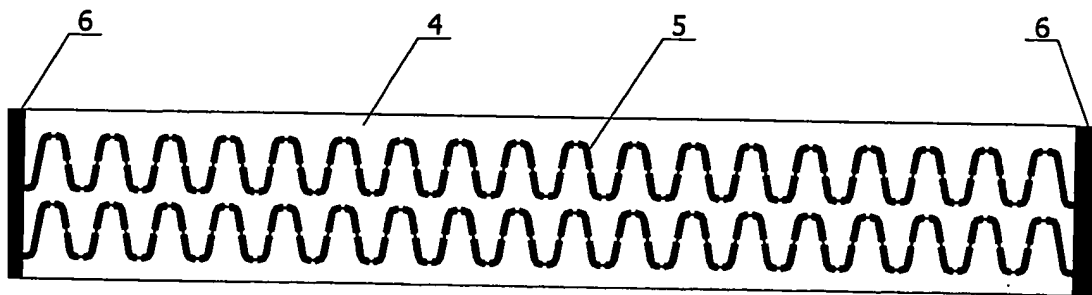


Fig. 5.

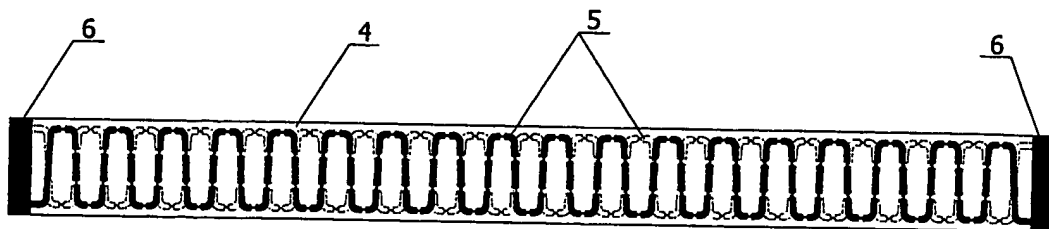


Fig. 6.

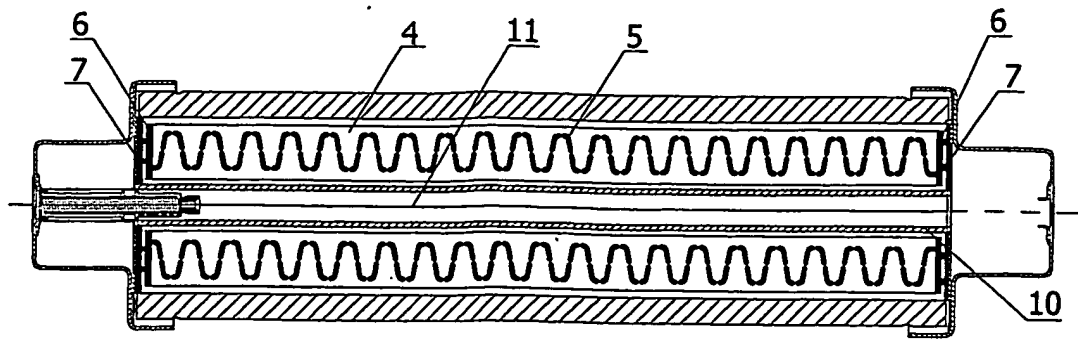


Fig. 7.

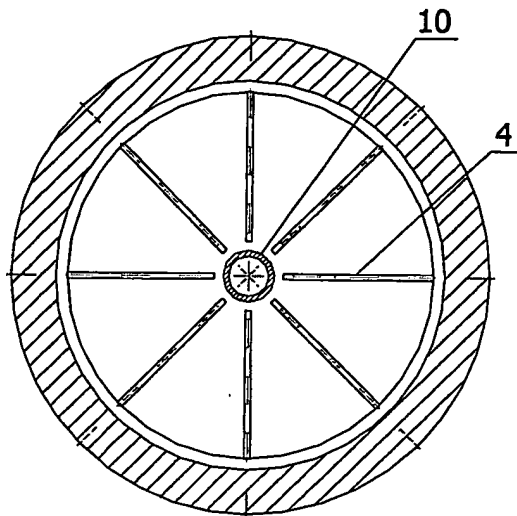


Fig. 8.

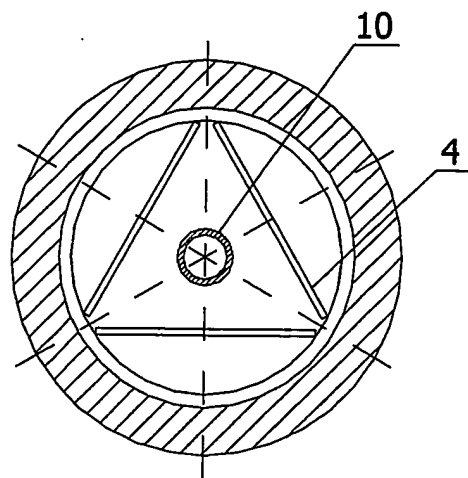


Fig. 9.

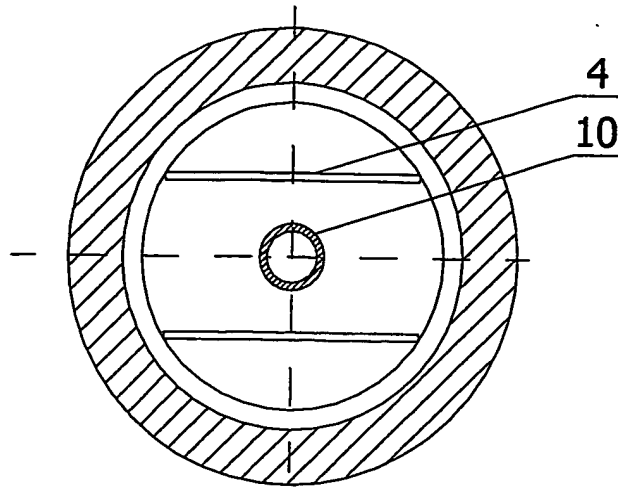


Fig. 10.

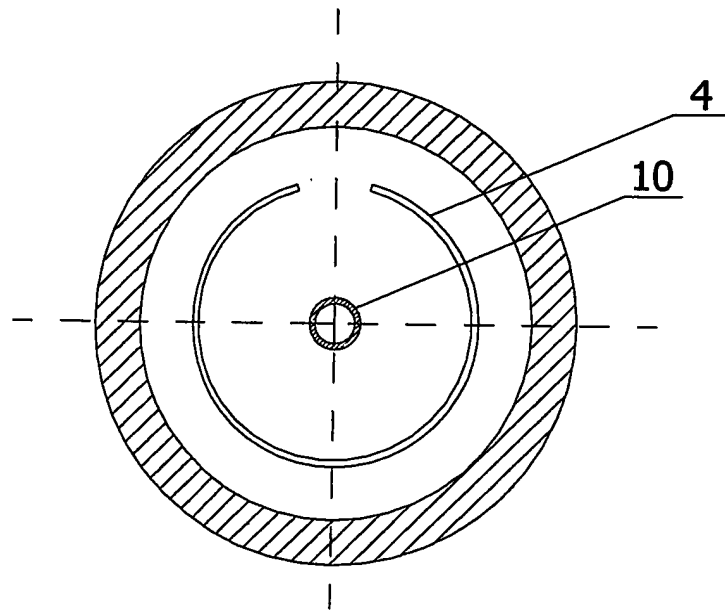


Fig. 11.

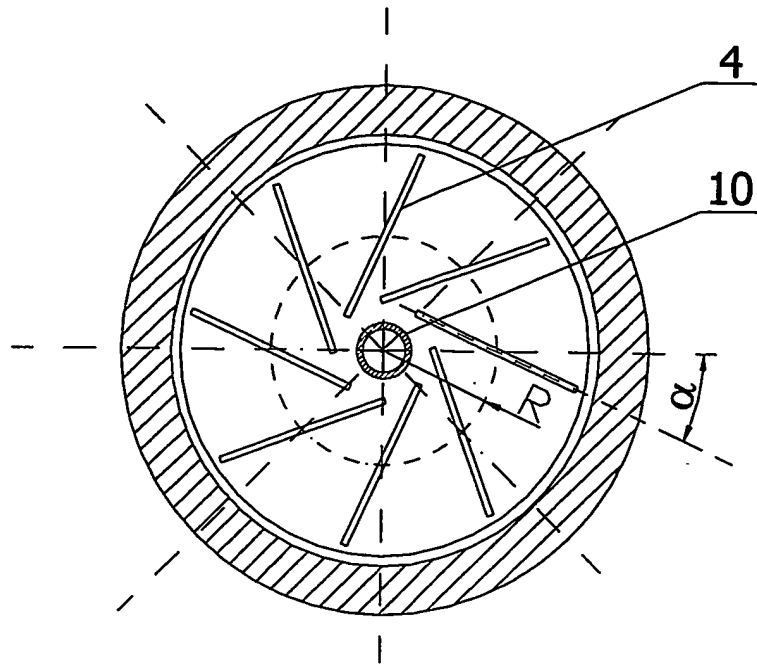


Fig. 12.

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H01H85/046 H01H85/042 H01H85/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 3 041 428 A (ALEXIS SOMMERS) 26 June 1962 (1962-06-26) the whole document ---	1-5, 11, 21; 22
Y	US 6 002 564 A (OHTSUCHI MASASHI) 14 December 1999 (1999-12-14) the whole document ---	1-5
Y	US 3 585 556 A (HINGORANY ASHOK R ET AL) 15 June 1971 (1971-06-15) the whole document ---	1-5, 11, 21, 22
A	US 3 523 264 A (FEENAN JOHN ET AL) 4 August 1970 (1970-08-04) the whole document --- -/-	18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

20 January 2004

Date of mailing of the international search report

29/01/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ruppert, H

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 3 624 580 A (ELLIOTT WILLIAM JAMES) 30 November 1971 (1971-11-30) the whole document</p>	24

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3041428	A	26-06-1962	NONE	
US 6002564	A	14-12-1999	JP 10228856 A	25-08-1998
US 3585556	A	15-06-1971	NONE	
US 3523264	A	04-08-1970	ES 352151 A1	16-06-1969
US 3624580	A	30-11-1971	CH 501995 A	15-01-1971
			DE 2008453 A1	18-03-1971
			FR 2034590 A5	11-12-1970
			GB 1232913 A	26-05-1971